
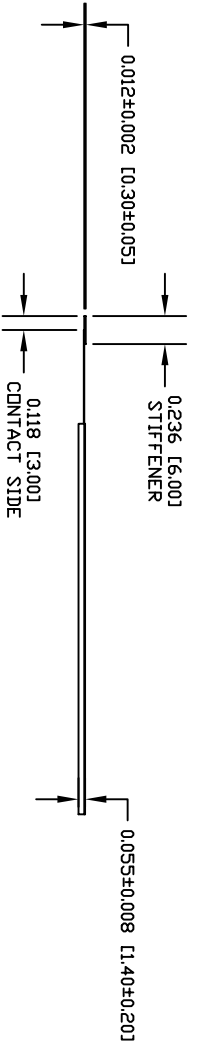
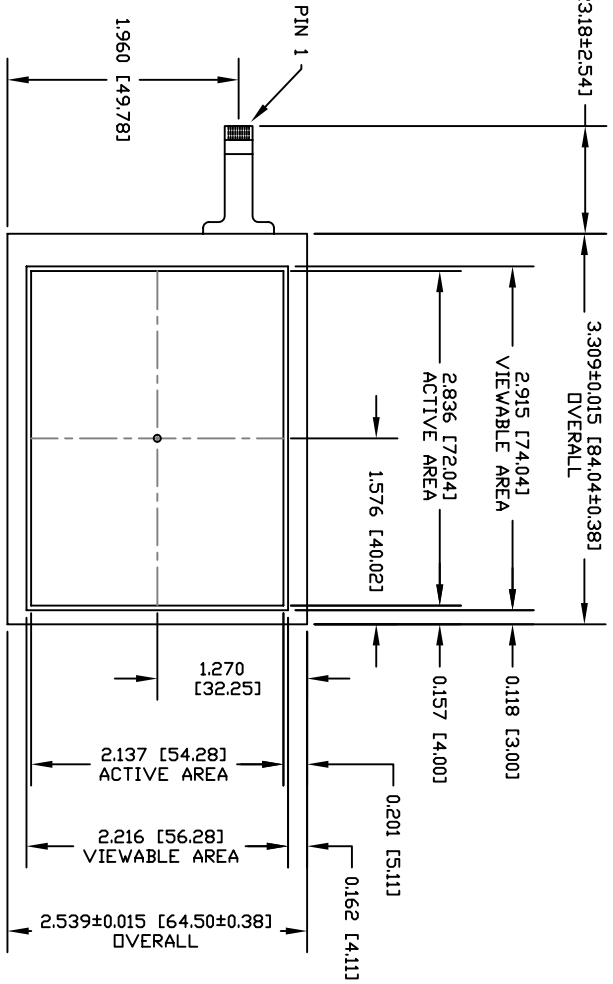


REV	INITIALS	DATE	DESCRIPTION

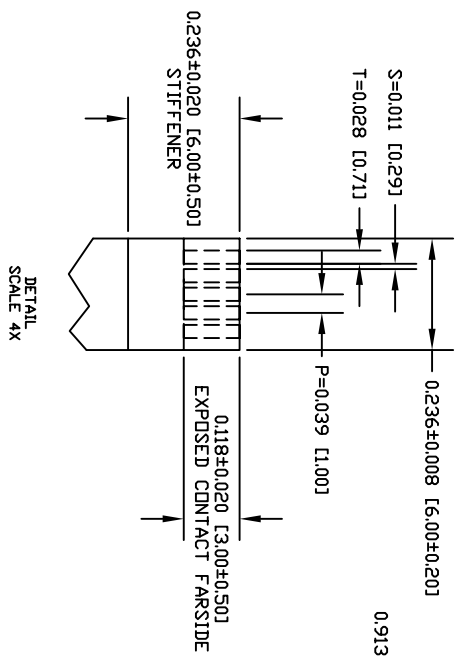

- NOTES:
1. TOLERANCE ± 0.015 UNLESS NOTED OTHERWISE.
 2. TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH A DIFFUSED SCRATCH RESISTANT COATING.
 3. PIN ONE LOCATION IS THE RIGHT PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
 4. PINDOUT TO BE AS INDICATED.

- PIN 1 - UPPER RIGHT.
- PIN 2 - UPPER LEFT.
- PIN 3 - SENSE.
- PIN 4 - LOWER LEFT.
- PIN 5 - LOWER RIGHT.
- FPC TAIL CONSTRUCTION IS KAPTON OVER 0.5 OZ CU TRACES.
- TAIL CONTACT END TO MATE WITH ZIF TYPE CONNECTOR.
- NOMINAL GLASS THICKNESS IS .043 CHEMICALLY STRENGTHENED.

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55605			
TITLE: 35" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 2/1/08	SCALE: 1:1	TOL: \pm 0.015
CHKD:	DATE:	PART NUMBER:	REV:
APVD:	DATE:	400333	