


REV	INITIALS	DATE	DESCRIPTION

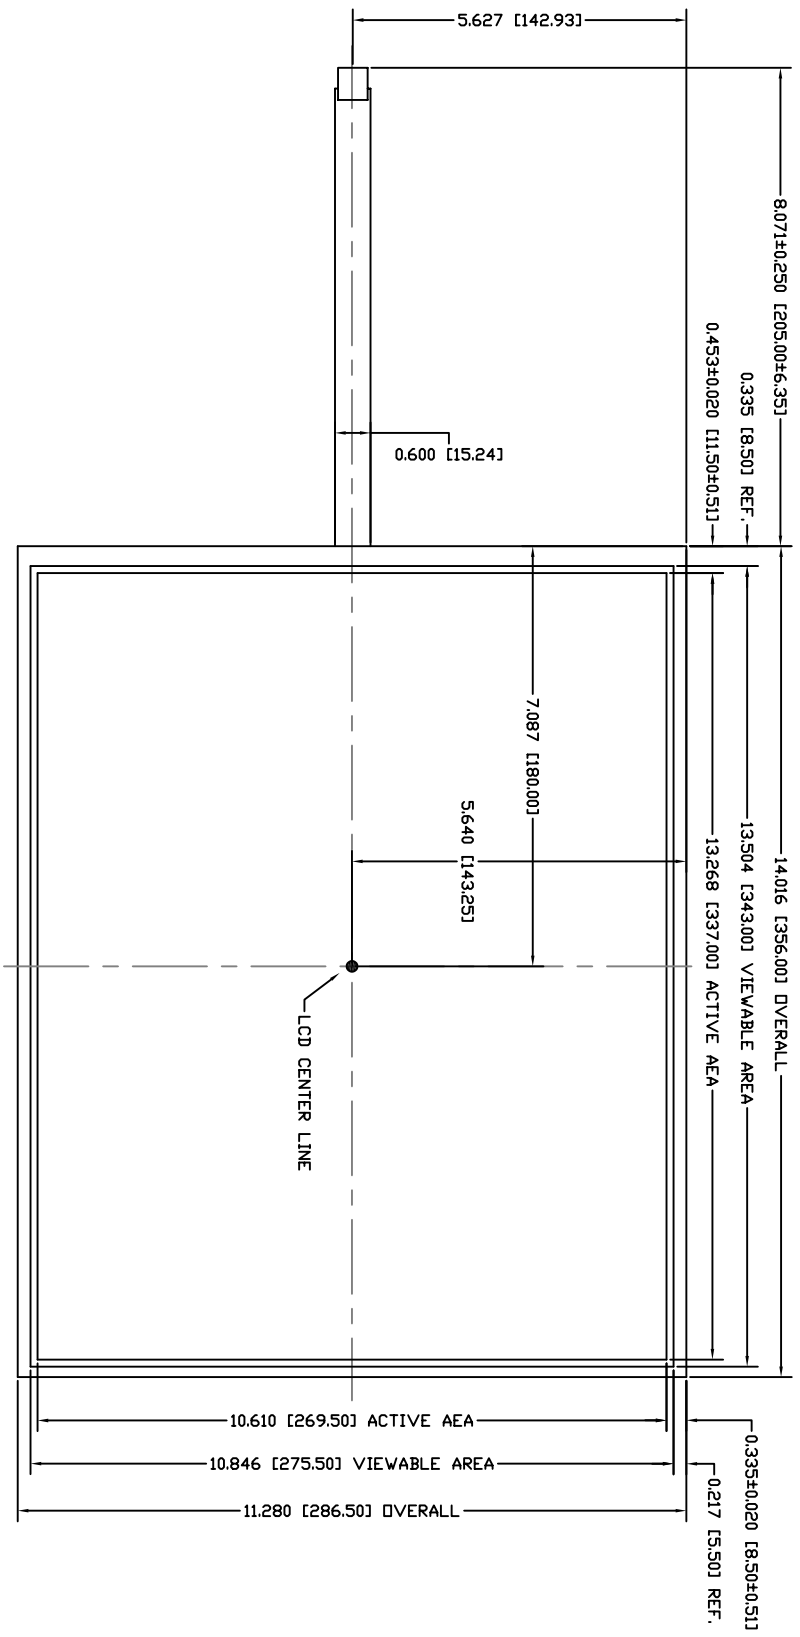

- NOTES:
1. TOLERANCE ±0.015 UNLESS NOTED OTHERWISE.
  2. TOP CONDUCTIVE LAYER TO BE 0.007" THICK POLYESTER WITH AN ANTI-GLARE SCRATCH RESISTANT COATING.
  3. PIN ONE LOCATION IS THE UPPER MOST PIN WHEN VIEWING SCREEN WITH CABLE TO THE LEFT.
  4. PINDUT TO BE AS INDICATED.
    - PIN 1 - UPPER RIGHT.
    - PIN 2 - LOWER RIGHT.
    - PIN 3 - SENSE.
    - PIN 4 - UPPER LEFT.
    - PIN 5 - LOWER LEFT.
  5. FLEX TAIL IS TERMINATED USING AMP RECEPTACLE PIN 2-487406-4 WITH HOUSING 487378-4 OR EQUIVALENTS.
  6. GLASS SUBSTRATE TO BE .074" THICK GLASS.
  7. NOMINAL PANEL THICKNESS IS .086" ±.008.

BERGQUIST TOUCH PRODUCTS			
301 WASHINGTON STREET CANNON FALLS, MN 55609			
TITLE: 17" DIAGONAL 5 WIRE TOUCHSCREEN			
DRN: MLR	DATE: 9/27/07	SCALE: 1:1	TOL: ±.015
CHKD:	DATE:	PART NUMBER: 400387	DWG REV:
APVD:	DATE:		